

## **A NOVEL STRUCTURE AND DESIGN OPTIMIZATION OF COMPACT SPLINE-PARAMETERIZED UWB SLOT ANTENNA**

**Sławomir Koziel, Adrian Bekasiewicz**

*Reykjavik University, School of Science and Engineering, Menntavegur 1, 101 Reykjavik, Iceland*  
(✉ [koziel@ru.is](mailto:koziel@ru.is), +354 599 6376, [bekasiewicz@ru.is](mailto:bekasiewicz@ru.is))

### **Abstract**

In this paper, a novel structure of a compact UWB slot antenna and its design optimization procedure has been presented. In order to achieve a sufficient number of degrees of freedom necessary to obtain a considerable size reduction rate, the slot is parameterized using spline curves. All antenna dimensions are simultaneously adjusted using numerical optimization procedures. The fundamental bottleneck here is a high cost of the *electromagnetic* (EM) simulation model of the structure that includes (for reliability) an SMA connector. Another problem is a large number of geometry parameters (nineteen). For the sake of computational efficiency, the optimization process is therefore performed using variable-fidelity EM simulations and surrogate-assisted algorithms. The optimization process is oriented towards explicit reduction of the antenna size and leads to a compact footprint of 199 mm<sup>2</sup> as well as acceptable matching within the entire UWB band. The simulation results are validated using physical measurements of the fabricated antenna prototype.

**Keywords:** compact antennas, computer-aided design (CAD), EM-driven design, UWB antennas, slot antennas, surrogate-based optimization.

© 2016 Polish Academy of Sciences. All rights reserved

### **1. Introduction**

Size reduction is one of the important criteria in the design of contemporary antennas [1]. It is especially important for wireless communication systems [2], wearable devices [3], as well as internet of things applications [4, 5]. Unfortunately, achieving a compact geometry and maintaining acceptable electrical performance are conflicting goals and, in practice, a compromise solution has to be sought. In the case of UWB antennas, reduction of size (and, consequently, a ground plane) leads to shortening the current path and matching problems at lower frequencies [2]. A number of techniques have been developed to alleviate this difficulty, such as various ground plane modifications (*e.g.*, I-shaped [6] and L-shaped stubs [7], protruded ground plane structures [8], slits below the feed line [7], stripline-fed designs [9], *etc.*) but also slot and quasi-slot structures [10].

Topological modifications leading to a reduced antenna size also result in an increased number of geometry parameters that need to be adjusted but also increase complexity of the structure. This means a higher computational cost of *evaluating the electromagnetic* (EM) simulation model of the antenna, also because the latter has to include – for the sake of reliability – additional components, such as a connector [7]. Taken together, the above factors make the process of adjusting structure dimensions very challenging. In particular, traditional design methods largely based on experience-driven parameters' sweeps are unable to yield truly optimum designs. This is not only because of the fact that multiple parameters cannot be effectively handled this way but, most importantly, because a typical design flow aims at obtaining an acceptable level of the in-band reflection (and, perhaps, other important

characteristics). A small size is normally a byproduct of the geometrical modifications introduced into the design, but not the effect of explicit minimization of the antenna dimensions through numerical optimization [10].

Cost-efficient simulation-driven design of antenna structures can be realized either through gradient-based optimization using adjoint sensitivities [11, 12] or by means of surrogate-assisted algorithms [13, 14]. The latter approach is more generic and accessible because the majority of surrogate-based techniques are derivative-free [13]. Efficient optimization methods enable to simultaneously handle the antenna size and its electrical performance parameters, see, e.g. [15].

In this paper, a novel structure of a compact UWB slot antenna is proposed. In order to increase the number of degrees of freedom the slot is parameterized using splines. The antenna dimensions are adjusted through automated numerical optimization involving variable-fidelity EM simulation models. The optimization process is oriented towards explicit size reduction of the structure. The final design features a very small footprint of 199 mm<sup>2</sup> and acceptable matching below -10 dB in the 3.1 GHz to 10.6 GHz frequency range. Experimental validation of the fabricated antenna prototype is provided.

## 2. Proposed spline-parameterized UWB slot antenna structure

The structure of proposed slot antenna is shown in Fig. 1. The geometry is based on a design of [16]. The reference structure consists of a microstrip line feed and a stepped impedance ground plane slot. The antenna proposed here has been modified to preserve the compact geometry and simultaneously ensure its acceptable electrical performance. The introduced changes include redesign of the geometry using splines, loading the driven element by the low-impedance stub, as well as introduction of additional degrees of freedom.

The structure is implemented on a Taconic RF-35 substrate ( $\epsilon_r = 3.5$ ,  $\tan\delta = 0.0018$ ,  $h = 0.762$  mm). The design parameters are:  $\mathbf{x} = [l_0 \ l_{g1r} \ l_{g2} \ l_{s1} \ l_{s2} \ l_{s3} \ l_{s4} \ l_{s5} \ l_{f1r} \ l_{f2r} \ w_{s1} \ w_{s2} \ w_{s3} \ w_{s4} \ w_{f2} \ o_{f1r} \ o_{s2r} \ o_{s3r} \ o_{s4r}]^T$ . Dependent dimensions (see Fig. 1) are:  $l_{g1} = l_{g1r}(l_0 - w_{s1})$ ,  $l_{f1} = l_{f1r}l_0(1 - l_{f2r})$ ,  $l_{f2} = l_0 \cdot l_{f1r} \cdot l_{f2r}$ ,  $o_{f1} = o_{f1r}(l_{s1} + l_{s2} + l_{s3} + l_{s4} + w_{s4} + l_{g2} - w_{f1})$ ,  $o_{s2} = 0.5(o_{s2r}(w_{s1} - w_{s2}) - w_{s2})$ ,  $o_{s3} = 0.5(o_{s3r}(w_{s2} - w_{s3}) - w_{s3})$  and  $o_{s4} = 0.5(o_{s4r}(w_{s3} - w_{s4}) - w_{s4})$ , whereas  $w_{f1} = 1.7$  remains fixed to ensure 50 Ohm input impedance (the unit of non-relative dimensions is mm). It should be noted that the structure is geometrically small. Therefore, its EM model is supplemented with an SMA connector to improve reliability of the simulation results.

## 3. Design optimization methodology

In this section, we briefly explain the design optimization technique utilized to adjust the geometry dimensions of the antenna. The optimization process is oriented towards explicit size reduction of the structure. The acceptable level of in-band reflection is ensured by means of a penalty function approach.

### 3.1. Computational models

The primary EM antenna model  $\mathbf{R}$  (referred to as the high-fidelity model) is implemented in CST Microwave Studio [17] and simulated using its time-domain solver. It contains about 5,500,000 mesh cells, and its evaluation time on a dual Intel E5540 machine with 6 GB of RAM is about 44 minutes. In the design process, we also exploit a coarse-discretization version of  $\mathbf{R}$ , referred to as the low-fidelity model  $\mathbf{R}_c$ , that is also implemented in CST (~475,000 mesh cells, simulation time 152 s).



#### 4. Numerical results

The initial antenna design  $\mathbf{x}^0 = [22 \ 0.52 \ 1.4 \ 2.3 \ 2.1 \ 1.6 \ 0.7 \ 2.7 \ 0.68 \ 0.5 \ 4.6 \ 0.8 \ 3.2 \ 0.9 \ 1.7 \ 0.7 \ 0 \ 0]^T$  has been estimated based on dimensions of the reference structure of [16]. The final design  $\mathbf{x}^* = [19.52 \ 0.39 \ 1.57 \ 3.8 \ 1.74 \ 1.49 \ 0.68 \ 2.61 \ 0.64 \ 0.46 \ 4.48 \ 0.69 \ 3.31 \ 0.93 \ 2.35 \ 0.72 \ 0.07 \ -0.99 \ 0.87]^T$  has been obtained after five iterations of the procedure described in Section 3.

Comparison of the antenna reflection responses at the initial and the final design is shown in Fig. 2. It should be noted that dimensions of the optimized structure are  $10.2 \text{ mm} \times 19.5 \text{ mm}$  and it features an overall footprint of  $199 \text{ mm}^2$ . Moreover, the final antenna design meets the imposed requirements concerning reflection: it is below the acceptable level of  $-10 \text{ dB}$  within the  $3.1 \text{ GHz}$  to  $10.6 \text{ GHz}$  band, which is not the case for the reference design of [16].

The proposed structure has been compared regarding the occupied area with other state-of-the-art structures including a miniaturized slot antenna [16], compact monopoles [4, 7, 18] and strip-line-fed structures [9]. The mentioned designs are implemented on substrates with varied electrical properties. For the sake of reliable comparison dimensions of the considered structures have been expressed as the guided wavelength  $\lambda_g$  (defined for the  $50 \text{ Ohm}$  line operating at the  $6.85 \text{ GHz}$  center frequency). The results gathered in Table 1 indicate that the proposed antenna structure, although not the smallest in respect of the absolute size, features the lowest  $\lambda_g^2$  footprint. It should be noted that, in metric units, the presented spline-parameterized antenna is slightly larger than the reference design of [16]. However, the reference antenna violates the specification upon the minimal acceptable in-band reflection below  $-10 \text{ dB}$ .

Table 1 Comparison of UWB antennas' geometry.

Antenna	Dimensions mm $\times$ mm	Size mm <sup>2</sup>	Effective $\lambda_g \times \lambda_g$	Footprint <sup>#</sup> $\lambda_g^2$
Design [18]	10.0 $\times$ 32.5	325	0.42 $\times$ 1.38	0.89
Design [9]	7.00 $\times$ 25.0	175	0.43 $\times$ 1.07	0.46
Design [4]	10.0 $\times$ 25.0	250	0.39 $\times$ 0.97	0.38
Design [7]	15.8 $\times$ 22.0	348	0.50 $\times$ 0.69	0.35
Design* [16]	8.50 $\times$ 22.0	187	0.35 $\times$ 0.92	0.32
This work	10.2 $\times$ 19.5	199	0.39 $\times$ 0.74	0.28

# For fair comparison, the antenna size is expressed in terms of the guided wavelength corresponding to the substrate properties the design is implemented on.

\* Design violates the imposed requirement upon the acceptable in-band reflection level below  $-10 \text{ dB}$ . The structure exhibits reflection below  $-8 \text{ dB}$ .

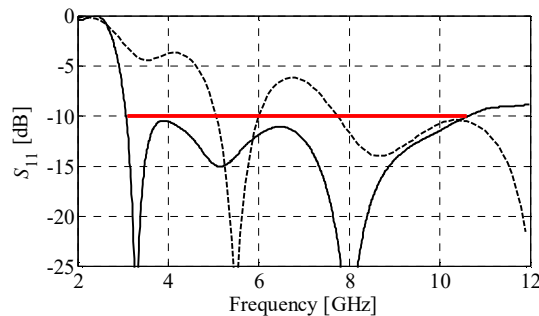


Fig. 2. The reflection response of the proposed UWB slot antenna at the initial (---) and the optimized (—) design.

## 5. Experiment

The proposed compact UWB antenna has been fabricated and measured. Photographs of the manufactured prototype are shown in Fig. 3. Fig. 4 presents a comparison of its simulated and measured reflection characteristics. The results are in a good agreement. The measured response slightly (below 0.3 dB) violates the design specification at its upper edge, which is considered acceptable for a structure with such small dimensions.

Figure 5 shows a comparison of the simulated and measured gain characteristics of the structure at the direction perpendicular to its surface (here, direction  $y$ ; *cf.* Fig. 1). The characteristics are in close resemblance. The average in-band gains are  $-0.8$  dB and  $-0.5$  for simulation and measurements, respectively.



Fig. 3. Photographs of the fabricated compact UWB slot antenna.

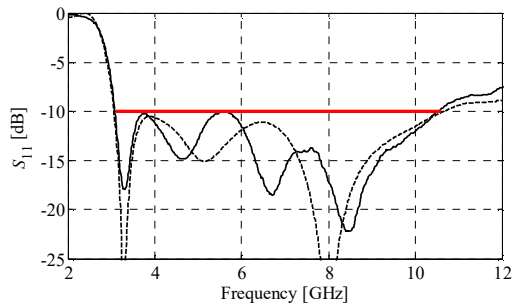


Fig. 4. The simulated (---) and measured (—) reflection characteristics of the proposed UWB antenna.

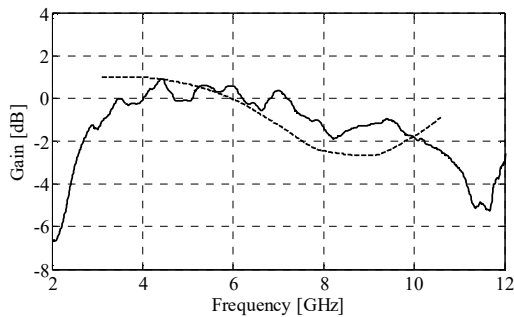


Fig. 5. The simulated (---) and measured (—) gain characteristics of the compact UWB slot antenna.

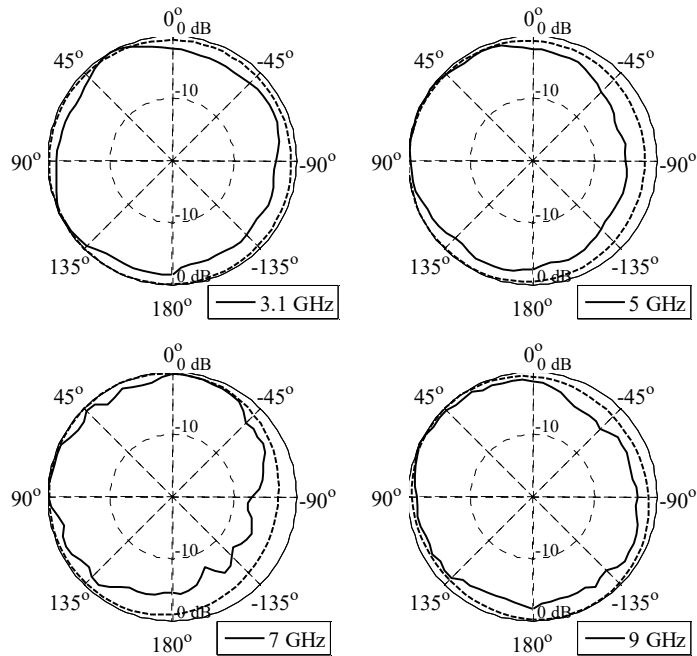


Fig. 6. Comparison of the simulated (---) and measured (—) H-plane radiation patterns of the proposed UWB slot antenna at selected frequency points.

A comparison of antenna E-field radiation patterns obtained for its H-plane ( $x$ - $y$  plane; cf. Fig. 1) is provided in Fig. 6. The agreement level between simulations and measurements is acceptable. It should be noted that the peak radiation pattern shifts clockwise with the frequency increase (from about  $135^\circ$  at 3.1 GHz to  $\sim 45^\circ$  at 9 GHz), however its change at  $90^\circ$  remains below 1.5 dB at selected frequencies and, from this perspective, it can be considered stable. Moreover, the H-plane front-to-back ratio remains below 3 dB and 7 dB for simulations and measurements, respectively. The discrepancies between simulated and measured field characteristics are mostly the result of electrically large measurement setup, which was not accounted for in the antenna EM model. To some extent, the observed discrepancies are also introduced by fabrication and assembly imperfections (allocation of the SMA connector, the influence of solder, *etc.*).

## 6. Conclusion

In the paper, a novel structure of a miniaturized UWB slot antenna with the spline-parameterized geometry has been proposed along with a computationally-efficient procedure for size-reduction-oriented optimization of its dimensions. Simultaneous adjustment of all relevant parameters led to a very compact size of only  $199 \text{ mm}^2$  while maintaining good electrical performance. Design correctness has been verified experimentally.

## Acknowledgement

The authors would like to thank Computer Simulation Technology AG, Darmstadt, Germany, for making CST Microwave Studio available. This work is partially supported

by the Icelandic Centre for Research (RANNIS) Grant 141272051 and by National Science Centre of Poland Grant 2014/15/B/ST7/04683.

## References

- [1] Bod, M., Hassani, H.R., Taheri, M.M.S. (2012). Compact UWB printed slot antenna with extra Bluetooth, GSM, and GPS bands. *IEEE Ant. Wireless Prop. Lett.*, 11, 531–534.
- [2] Guo, L., Wang, S., Chen, X., Parini, C.G. (2010). Study of compact antenna for UWB applications. *Electronics Lett.*, 46(2), 115–116.
- [3] Ur-Rehman, M., Abbasi, Q.H., Akram, M., Parini, C. (2015). Design of band-notched ultra wideband antenna for indoor and wearable wireless communications. *IET Microwaves, Ant. Prop.*, 9(3), 243–251.
- [4] Chahat, N., Zhadobov, M., Sauleau, R., Ito, K. (2011). A compact UWB antenna for on-body applications. *IEEE Trans. Ant. Prop.*, 59(4), 1123–1131.
- [5] Ning, H. (2013). *Unit and ubiquitous internet of things*. CRC Press.
- [6] Li, L., Cheung, S.W., Yuk, T.I. (2013). Compact MIMO antenna for portable devices in UWB applications. *IEEE Trans. Antennas Prop.*, 61(8), 4257–4264.
- [7] Bekasiewicz, A., Koziel, S. (2015). Structure and Computationally-Efficient Simulation-Driven Design of Compact UWB Monopole Antenna. *IEEE Ant. Wireless Prop. Lett.*, 14, 1282–1285.
- [8] Li, J.F., Chu, Q.X., Li, Z.H., Xia, X.X. (2013). Compact Dual Band-Notched UWB MIMO Antenna With High Isolation. *IEEE Trans. Ant. Prop.*, 61(9), 4759–4766.
- [9] Roshna, T.K., Deepak, U., Sajitha, V.R., Mohanan, P. (2014). Coplanar stripline-fed compact UWB antenna. *Electronics Lett.*, 50(17), 1181–1182.
- [10] Gautam, A.K., Yadav, S., Kanaujia, B.K. (2013). A CPW-fed compact UWB microstrip antenna. *IEEE Ant. Wireless Prop. Lett.*, 12, 151–154.
- [11] Song S., Nikolova, N.K. (2008). Memory efficient method for wideband self-adjoint sensitivity analysis. *IEEE Trans. Microwave Theory Tech.*, 56(8), 1917–1927.
- [12] Ghassemi, M., Bakr M., Sangary, N. (2013). Antenna design exploiting adjoint sensitivity-based geometry evolution. *IET Microwaves Ant. Prop.*, 7(4), 268–276.
- [13] Koziel, S., Ogurtsov, S. (2014). *Antenna design by simulation-driven optimization*. Springer.
- [14] Yelten, M.B., Zhu, T., Koziel, S., Franzon, P.D., Steer, M.B. (2012). Demystifying surrogate modeling for circuits and systems. *IEEE Circuits and Systems Magazine*, 12(1), 45–63.
- [15] Koziel, S., Bekasiewicz, A. (2015). Fast EM-driven size reduction of antenna structures by means of adjoint sensitivities and trust regions. *IEEE Antennas Wireless Prop. Lett.*, 14, 1681–1684.
- [16] Chu, Q.X., Mao, C.X., Zhu, H. (2013). A compact notched band UWB slot antenna with sharp selectivity and controllable bandwidth. *IEEE Trans. Ant. Prop.*, 61, 3961–3966.
- [17] CST Microwave Studio, ver. 2013, CST AG, Bad Nauheimer Str. 19, Germany, 2013.
- [18] Liu, Y.F., Wang, P., Qin, H. (2014). Compact ACS-fed UWB monopole antenna with extra Bluetooth band. *Electronics Lett.*, 50(18), 1263–1264.